


## ECOFLEX M42

Features:

- Ideal for cutting small and medium work pieces
- Vibration damping, variable tooth pitch
- Tooth tips made of particularly wear-resistant quality

- For small and medium work piece dimensions
- For profiles and solid materials
- For demanding shop operations
- For all steels up to 45 HRC

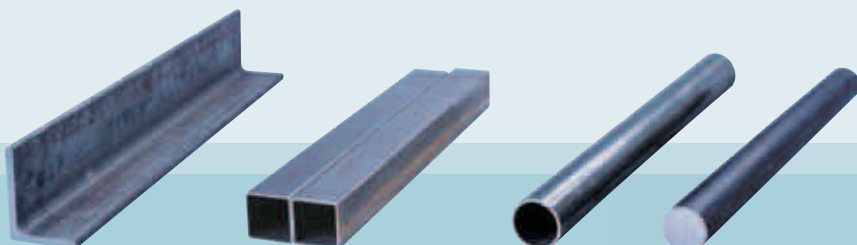

## WIKUS ECOFLEX M42

**Item group 523**  
**ECOFLEX M42 (68-69 HRC)**

Dimensions Width x thickness		Tooth pitch Tz in teeth per inch (tpi) Standard set (SD)						
mm	Inches	2 - 3	3 - 4	4 - 6	5 - 8	6 - 10	8 - 12	10 - 14
20 x 0,90	$\frac{3}{4}$ x 0,035			K	S	S	S	S
27 x 0,90	$1\frac{1}{16}$ x 0,035		K	K	S	S	S	S
34 x 1,10	$1\frac{3}{8}$ x 0,042	K	K	K	S	S	S	
41 x 1,30	$1\frac{5}{8}$ x 0,050	K	K	K				

**Item group 523**  
**ECOFLEX M42 NE (68-69 HRC) with extra wide set for treating non-ferrous metals**

Dimensions Width x thickness		Tooth pitch Tz in teeth per inch (tpi) Extra wide set	
mm	Inches		
20 x 0,90	$\frac{3}{4}$ x 0,035	3	4
27 x 0,90	$1\frac{1}{16}$ x 0,035	K	K
34 x 1,10	$1\frac{3}{8}$ x 0,042	K	K